

Data sheet

ELIMINATOR® liquid line filter drier

Types DCL and DML



All ELIMINATOR® driers have a solid core with binding material held to an absolute minimum.

There are two types of ELIMINATOR® cores. Type DML driers have a core composition of 100% Molecular Sieve, while type DCL contain 80% Molecular Sieve with 20% activated alumina.

ELIMINATOR® type DML driers are designed for applications requiring the highest moisture capacity.

ELIMINATOR® type DCL driers are designed for applications requiring high moisture capacity and acid adsorption capacity.

Available with solder (pure copper) and flare connections.

Features

The Core type DML

- 100% 3Å Molecular Sieve core.
- High drying capacity minimizing the risk of acid formation (hydrolysis).
- Recommended for use with HC, HFC and HCFC refrigerants,
- Will not deplete oil additives.

The Core type DCL

- 80% 3Å Molecular Sieve with 20% activated alumina,
- Perfect core blend for systems that operate at high condensing temperatures and require high drying capacity,
- Recommended for use with HC, HFC and HCFC refrigerants.

The Shell

- UL approved for PS/MWP up to 46 bar/667 psig,
- Available with solder (pure copper) and flare connections,
- Corrosion resistant powder-painted finish. Special coating for marine applications available upon request,
- Allows installation with any orientation provided the arrow is in the flow direction,
- Available in sizes from 3 – 75 cubic inches.

The Filter

- 25 µm (0.001 in.) filter provides high retention with minimal pressure drop,
- Thermally stable up to 120 °C.

Approvals

UL file no. SA 6398
PED 97/23/EC - a3p3


Compliant with ATEX hazard zone 2

Note: Only solder versions (cu-plated/pure copper) and connection sizes below 25mm are approved for flammable refrigerants now.


Introduction

ELIMINATOR® liquid line filter driers protect refrigeration and air-conditioning systems from moisture, acids, and solid particles.


With these contaminants eliminated, systems are safer from harmful chemical reactions and from abrasive impurities.

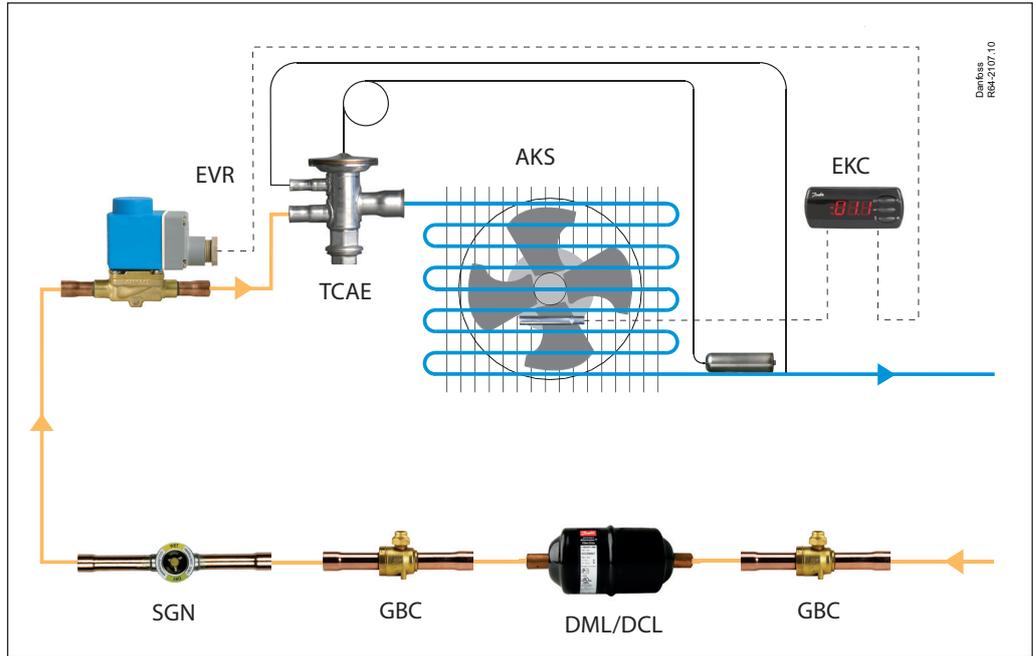

Technical data



Flare connection



Solder connection (pure copper)

Surface and volume

Filter	Solid core surface [cm ²]	Solid core volume [cm ³]	Filter drier volume (shell volume) [l]	Filter drier volume (net volume) [l]
DML/DCL 03	82	41	0.08	0.038
DML/DCL 05	95	67	0.12	0.051
DML/DCL 08	131	104	0.17	0.065
DML/DCL 16	220	234	0.36	0.122
DML/DCL 30	378	494	0.72	0.224
DML/DCL 41	510	681	0.97	0.286
DML/DCL 60	756	988	1.34	0.352
DML/DCL 75	1019	1363	1.81	0.450

Acid capacity

Filter	Acid capacity ¹⁾ [g]
DCL 03	0.58
DCL 05	0.87
DCL 08	1.36
DCL 16	3.12
DCL 30	6.40
DCL 41	8.90
DCL 60	12.80
DCL 75	17.80

Temperature range
-40 – 70 °C (-40 – 160 °F)

Maximum working pressure
PS 46 bar

¹⁾ Adsorption capacity of oleic acid at 0.05 TAN (Total Acid Number).

Technical data and capacities

Drying and liquid capacity, type DML

Type	Drying capacity [kg] refrigerant ¹⁾														Liquid capacity [kW] ²⁾						
	R134a		R404A		R507		R22		R407C		R410A		R32		R134a	R404A	R507	R22	R407C	R410A	R32
	[°C]																				
	24	52	24	52	24	52	24	52	24	52	24	52	24	52	24	52					
DML 032/032s	5.0	4.7	5.3	5.1	5.4	5.0	5.0	4.7	5.0	4.6	4.5	4.2	4.6	4.2	6.70	5.01	4.86	7.45	7.09	7.43	10.86
DML 032.5s	5.0	4.7	5.3	5.1	5.4	5.0	5.0	4.7	5.0	4.6	4.5	4.2	4.6	4.2	9.59	6.97	6.75	10.52	9.97	10.31	15.10
DML 033/033s	5.0	4.7	5.3	5.1	5.4	5.0	5.0	4.7	5.0	4.6	4.5	4.2	4.6	4.2	12.85	9.86	9.57	14.46	13.84	14.67	21.40
DML 034s	5.0	4.7	5.3	5.1	5.4	5.0	5.0	4.7	5.0	4.6	4.5	4.2	4.6	4.2	24.71	20.12	19.57	28.60	27.65	30.13	43.78
DML 052/052s	7.9	7.5	8.5	8.1	8.6	8.0	8.0	7.4	7.9	7.3	7.2	6.6	7.3	6.7	7.67	5.62	5.45	8.45	8.02	8.32	12.18
DML 052.5s	7.9	7.5	8.5	8.1	8.6	8.0	8.0	7.4	7.9	7.3	7.2	6.6	7.3	6.7	9.58	7.01	6.80	10.54	10.01	10.38	15.19
DML 053/053s	7.9	7.5	8.5	8.1	8.6	8.0	8.0	7.4	7.9	7.3	7.2	6.6	7.3	6.7	12.87	9.81	9.52	14.44	13.80	14.58	21.28
DML 054s	7.9	7.5	8.5	8.1	8.6	8.0	8.0	7.4	7.9	7.3	7.2	6.6	7.3	6.7	25.70	20.77	20.19	29.64	28.62	31.07	45.17
DML 055s	7.9	7.5	8.5	8.1	8.6	8.0	8.0	7.4	7.9	7.3	7.2	6.6	7.3	6.7	36.22	29.07	28.25	41.63	40.15	43.45	63.19
DML 082/082s	12.6	11.9	13.6	12.9	13.8	12.8	12.8	11.8	12.7	11.7	11.5	10.6	11.7	10.8	7.68	5.44	5.27	8.32	7.85	8.02	11.77
DML 082.5s	12.6	11.9	13.6	12.9	13.8	12.8	12.8	11.8	12.7	11.7	11.5	10.6	11.7	10.8	10.53	7.84	7.61	11.69	11.13	11.63	17.01
DML 083/083s	12.6	11.9	13.6	12.9	13.8	12.8	12.8	11.8	12.7	11.7	11.5	10.6	11.7	10.8	14.19	10.98	10.66	16.03	15.37	16.35	23.85
DML 084/084s	12.6	11.9	13.6	12.9	13.8	12.8	12.8	11.8	12.7	11.7	11.5	10.6	11.7	10.8	28.61	21.33	20.68	31.76	30.24	31.63	46.24
DML 085/085s	12.6	11.9	13.6	12.9	13.8	12.8	12.8	11.8	12.7	11.7	11.5	10.6	11.7	10.8	43.81	35.32	34.33	50.47	48.71	52.83	76.81
DML 162/162s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	7.68	5.43	5.26	8.31	7.85	8.01	11.75
DML 162.5s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	10.57	7.36	7.12	11.36	10.69	10.83	15.91
DML 163/163s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	16.33	11.18	10.82	17.41	16.33	16.43	24.16
DML 164/164s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	32.19	23.54	22.81	35.40	33.60	34.83	50.99
DML 165/165s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	44.64	36.59	35.59	51.82	50.16	54.83	79.63
DML 166/166s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	45.53	37.37	36.35	52.89	51.20	56.01	81.33
DML 167s	27.7	26.2	29.8	28.3	30.4	28.0	28.1	26.0	27.8	25.7	25.3	23.3	25.6	23.6	43.92	40.14	39.19	53.50	52.78	60.97	87.77
DML 303/303s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	15.70	10.56	10.20	16.59	15.52	15.48	22.79
DML 304/304s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	32.51	25.00	24.26	36.63	35.06	37.19	54.26
DML 305/305s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	45.71	36.96	35.93	52.72	50.91	55.29	80.38
DML 306/306s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	43.73	39.89	38.95	53.22	52.49	60.57	87.22
DML 307s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	64.25	53.95	52.51	75.40	73.29	81.06	117.51
DML 309s	57.7	54.6	62.0	58.8	63.1	58.3	58.5	54.0	57.8	53.4	52.6	48.5	53.3	49.2	83.62	69.78	67.90	97.86	95.02	104.77	114.45
DML 413	77.9	73.6	83.7	79.4	85.2	78.7	78.9	72.9	78.0	72.1	71.0	65.5	71.9	66.3	18.40	12.44	12.02	19.49	18.25	18.25	26.86
DML 414/414s	77.9	73.6	83.7	79.4	85.2	78.7	78.9	72.9	78.0	72.1	71.0	65.5	71.9	66.3	33.39	26.45	25.70	38.15	36.70	39.48	57.48
DML 415/415s	77.9	73.6	83.7	79.4	85.2	78.7	78.9	72.9	78.0	72.1	71.0	65.5	71.9	66.3	55.48	41.84	40.58	61.92	59.08	62.11	90.74
DML 417s	77.9	73.6	83.7	79.4	85.2	78.7	78.9	72.9	78.0	72.1	71.0	65.5	71.9	66.3	66.74	56.32	54.82	78.50	76.37	84.67	122.70
DML 419s	77.9	73.6	83.7	79.4	85.2	78.7	78.9	72.9	78.0	72.1	71.0	65.5	71.9	66.3	95.30	76.29	74.14	109.42	105.47	114.01	165.86
DML 604s	116.9	110.5	125.7	119.1	127.9	118.2	118.4	109.5	117.1	108.2	106.6	98.2	107.9	99.6	27.88	26.22	25.63	34.36	34.07	39.98	57.41
DML 607s	116.9	110.5	125.7	119.1	127.9	118.2	118.4	109.5	117.1	108.2	106.6	98.2	107.9	99.6	70.08	70.13	68.74	88.48	88.70	107.99	154.09
DML 609s	116.9	110.5	125.7	119.1	127.9	118.2	118.4	109.5	117.1	108.2	106.6	98.2	107.9	99.6	61.35	73.05	72.40	81.77	84.39	117.36	162.79
DML 757s	159.8	151.1	171.8	162.9	174.9	161.6	161.9	149.7	160.2	148.0	145.8	134.3	147.5	136.1	84.97	71.70	69.80	99.95	97.23	107.81	156.22
DML 759s	159.8	151.1	171.8	162.9	174.9	161.6	161.9	149.7	160.2	148.0	145.8	134.3	147.5	136.1	84.22	87.19	85.60	107.64	108.54	135.08	191.97

¹⁾ Drying capacity is based on following moisture content test

- standards before and after drying:
- R134a: 1050 – 50 ppm W.
 - R404A, R507: 1020 – 50 ppm W.
 - R407C: 1020 – 50 ppm W.
 - R410A: 1050 – 50 ppm W.
 - R22: 1050 – 60 ppm W

In accordance with ARI 710-2004.

²⁾ Given in accordance with ARI 710-2004 for

- $t_e = -15\text{ °C (5 °F)}$,
 $t_s = 30\text{ °C (85 °F)}$ and
 $\Delta p = 0.07\text{ bar (1 psig)}$.

Technical data and capacities (continued)

Drying and liquid capacity, type DCL

Type	Drying capacity [kg] refrigerant ¹⁾														Liquid capacity [kW] ²⁾						
	R134a		R404A		R507		R22		R407C		R410A		R32		R134a	R404A	R507	R22	R407C	R410A	R32
	[°C]																				
	24	52	24	52	24	52	24	52	24	52	24	52	24	52							
DCL 032/032s	3.9	3.6	4.2	3.9	4.2	3.9	3.9	3.6	3.9	3.6	3.5	3.2	3.6	3.3	6.70	5.01	4.86	7.45	7.09	7.43	10.86
DCL 032.5s	3.9	3.6	4.2	3.9	4.2	3.9	3.9	3.6	3.9	3.6	3.5	3.2	3.6	3.3	9.59	6.97	6.75	10.52	9.97	10.31	15.10
DCL 033/033s	3.9	3.6	4.2	3.9	4.2	3.9	3.9	3.6	3.9	3.6	3.5	3.2	3.6	3.3	12.85	9.86	9.57	14.46	13.84	14.67	21.40
DCL 052/052s	6.2	5.8	6.6	6.3	6.7	6.2	6.2	5.8	6.2	5.7	5.6	5.2	5.7	5.3	7.67	5.62	5.45	8.45	8.02	8.32	12.18
DCL 052.5s	6.2	5.8	6.6	6.3	6.7	6.2	6.2	5.8	6.2	5.7	5.6	5.2	5.7	5.3	9.58	7.01	6.80	10.54	10.01	10.38	15.19
DCL 053/053s	6.2	5.8	6.6	6.3	6.7	6.2	6.2	5.8	6.2	5.7	5.6	5.2	5.7	5.3	7.67	9.81	9.52	14.44	13.80	14.58	21.28
DCL 082/082s	9.8	9.3	10.6	10.0	10.8	10.0	10.0	9.2	9.9	9.1	9.0	8.3	9.1	8.4	7.68	5.44	5.27	8.32	7.85	8.02	11.77
DCL 082.5s	9.8	9.3	10.6	10.0	10.8	10.0	10.0	9.2	9.9	9.1	9.0	8.3	9.1	8.4	10.53	7.84	7.61	11.69	11.13	11.63	17.01
DCL 083/083s	9.8	9.3	10.6	10.0	10.8	10.0	10.0	9.2	9.9	9.1	9.0	8.3	9.1	8.4	14.19	10.98	10.66	16.03	15.37	16.35	23.85
DCL 084/084s	9.8	9.3	10.6	10.0	10.8	10.0	10.0	9.2	9.9	9.1	9.0	8.3	9.1	8.4	28.61	21.33	20.68	31.76	30.24	31.63	46.24
DCL 162/162s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	7.68	5.43	5.26	8.31	7.85	8.01	11.75
DCL 162.5s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	10.57	7.36	7.12	11.36	10.69	10.83	15.91
DCL 163/163s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	16.33	11.18	10.82	17.41	16.33	16.43	24.16
DCL 164/164s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	32.19	23.54	22.81	35.40	33.60	34.83	50.99
DCL 165/165s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	44.64	36.59	35.59	51.82	50.16	54.83	79.63
DCL 166/166s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	45.53	37.37	36.35	52.89	51.20	56.01	81.33
DCL 167s	21.6	20.5	23.3	22.1	23.7	21.9	21.9	20.3	21.7	20.0	19.7	18.2	20.0	18.4	43.92	40.14	39.19	53.50	52.78	60.97	87.77
DCL 303/303s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	15.70	10.56	10.20	16.59	15.52	15.48	22.79
DCL 304/304s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	32.51	25.00	24.26	36.63	35.06	37.19	54.26
DCL 305/305s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	45.71	36.96	35.93	52.72	50.91	55.29	80.38
DCL 306/306s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	43.73	39.89	38.95	53.22	52.49	60.57	87.22
DCL 307s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	64.25	53.95	52.51	75.40	73.29	81.06	117.51
DCL 309s	45.6	43.1	49	46.5	49.9	46.1	46.2	42.7	45.7	42.2	41.6	38.3	42.1	38.8	83.62	69.78	67.90	97.86	95.02	104.77	114.45
DCL 413	63.3	59.8	68.1	64.5	69.3	64.0	64.1	59.3	63.4	58.6	57.7	53.2	58.4	53.9	18.40	12.44	12.02	19.49	18.25	18.25	26.86
DCL 414/414s	63.3	59.8	68.1	64.5	69.3	64.0	64.1	59.3	63.4	58.6	57.7	53.2	58.4	53.9	33.39	26.45	25.70	38.15	36.70	39.48	57.48
DCL 415/415s	63.3	59.8	68.1	64.5	69.3	64.0	64.1	59.3	63.4	58.6	57.7	53.2	58.4	53.9	55.48	41.84	40.58	61.92	59.08	62.11	90.74
DCL 417s	63.3	59.8	68.1	64.5	69.3	64.0	64.1	59.3	63.4	58.6	57.7	53.2	58.4	53.9	66.74	56.32	54.82	78.50	76.37	84.67	122.70
DCL 419s	63.3	59.8	68.1	64.5	69.3	64.0	64.1	59.3	63.4	58.6	57.7	53.2	58.4	53.9	95.30	76.29	74.14	109.42	105.47	114.01	165.86
DCL 604s	91.2	86.2	98.0	92.9	99.8	92.2	92.3	85.4	91.4	84.4	83.2	76.6	84.1	77.6	27.88	26.22	25.63	34.36	34.07	39.98	57.41
DCL 607s	91.2	86.2	98.0	92.9	99.8	92.2	92.3	85.4	91.4	84.4	83.2	76.6	84.1	77.6	70.08	70.13	68.74	88.48	88.70	107.99	154.09
DCL 609s	91.2	86.2	98.0	92.9	99.8	92.2	92.3	85.4	91.4	84.4	83.2	76.6	84.1	77.6	61.35	73.05	72.40	81.77	84.39	117.36	162.79
DCL 757s	126.6	119.7	136.1	129.0	138.5	128.0	128.3	118.6	126.9	117.2	115.5	106.4	116.9	107.8	84.97	71.70	69.80	99.95	97.23	107.81	156.22
DCL 759s	126.6	119.7	136.1	129.0	138.5	128.0	128.3	118.6	126.9	117.2	115.5	106.4	116.9	107.8	84.22	87.19	85.60	107.64	108.54	135.08	191.97

¹⁾ Drying capacity is based on following moisture content test standards before and after drying:
 – R134a: 1050 – 50 ppm W.
 – R404A, R507: 1020 – 50 ppm W.
 – R407C: 1020 – 50 ppm W.
 – R410A: 1050 – 60 ppm W.
 – R22: 1050 – 60 ppm W
 in accordance with ARI 710-2004.

²⁾ Given in accordance with ARI 710-2004 for
 $t_c = -15\text{ °C (5 °F)}$,
 $t_c = 30\text{ °C (85 °F)}$
 $\Delta p = 0.07\text{ bar (1 psig)}$.


Conversions

$$\text{Drops of water} = \frac{(\text{kg of refrigerant} \times (\text{Initial PPM of water} - \text{Final PPM of water}))}{50}$$

See ARI standard 710-86 for recommended initial and final PPM values for different refrigerants.

Ordering

Type DCL flare

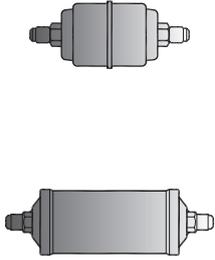


Type	Conn.		Multi pack		Industrial pack for OEM only	
	[in.]	[mm]	Code no.	Qty.	Code no.	Qty.
DCL 032	1/4	6	023Z5000 ¹⁾	32	—	28
DCL 032	1/4	6	023Z5075	32	—	28
DCL 033	3/8	10	023Z5001 ¹⁾	32	—	28
DCL 033	3/8	10	023Z5089	32	—	16
DCL 052	1/4	6	023Z5002	24	023Z8002	16
DCL 053	3/8	10	023Z5003	24	023Z8003	16
DCL 082	1/4	6	023Z5004	24	023Z8004	16
DCL 083	3/8	10	023Z5005	24	023Z8005	16
DCL 084	1/2	12	023Z5006	24	—	—
DCL 162	1/4	6	023Z5007	12	023Z8007	12
DCL 163	3/8	10	023Z5008	12	023Z8008	12
DCL 164	1/2	12	023Z5009	12	023Z8009	12
DCL 165	5/8	16	023Z5010	12	023Z8010	12
DCL 166	3/4	19	023Z5011	12	—	12
DCL 303	3/8	10	023Z0012	8	—	8
DCL 304	1/2	12	023Z0013	8	023Z3013	8
DCL 305	5/8	16	023Z0014	8	023Z3014	8
DCL 306	3/4	19	023Z0156	8	—	—
DCL 414	1/2	12	023Z0102	8	—	6
DCL 415	5/8	16	023Z0103	8	—	6

¹⁾ Wire mesh in filter drier outlet


Ordering
(continued)

Type DCL Solder (copper)

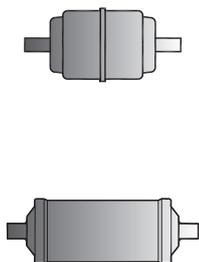

Type	Conn.	Multi pack		Industrial pack for OEM only		Conn.	Multi pack	
	[in.]	Code no.	Qty.	Code no.	Qty.	[mm]	Code no.	Qty.
DCL 032s	1/4	023Z5013 ¹⁾	32	023Z8013 ¹⁾	28	3	—	32
DCL 032.5s	5/16	023Z5014	32	—	28	8	—	32
DCL 033s	3/8	023Z5015	32	—	28	10	023Z5016	32
DCL 052s	1/4	023Z5018	24	—	16	6	—	24
DCL 053s	3/8	023Z5019	24	023Z8011	16	10	023Z5020	24
DCL 082s	1/4	023Z5022	24	—	16	6	—	24
DCL 083s	3/8	023Z5023	24	023Z8023	16	10	023Z5024	24
DCL 084s	1/2	023Z5026	24	023Z8026	16	12	023Z5025	24
DCL 085s	5/8	023Z5145	24	—	—	—	—	—
DCL 162s	1/4	023Z5028	12	—	12	6	023Z5027	12
DCL 163s	3/8	023Z5029	12	—	12	10	023Z5030	12
DCL 164s	1/2	023Z5032	12	023Z8032	12	12	023Z5031	12
DCL 165s	5/8	023Z5033	12	—	12	12	—	12
DCL 166s	3/4	023Z5070	12	—	12	—	—	12
DCL 167s	7/8	023Z5034	12	—	12	—	—	12
DCL 303s	3/8	023Z0030	8	—	8	10	—	8
DCL 304s	1/2	023Z0031	8	—	8	12	—	8
DCL 305s	5/8	023Z0032	8	023Z3032	8	16	—	8
DCL 306s	3/4	023Z0033	8	—	8	18	023Z0216	8
DCL 307s	7/8	023Z0034	8	—	8	22	—	8
DCL 309s	1 1/8	023Z0035	8	—	8	28	—	8
DCL 414s	1/2	023Z0104	8	—	6	12	—	8
DCL 415s	5/8	023Z0105	8	—	6	16	—	8
DCL 417s	7/8	023Z0106	8	—	6	22	—	8
DCL 419s	1 1/8	023Z0107	8	—	6	28	—	8
DCL 607s	7/8	023Z0036	12	—	—	22	—	12
DCL 609s	1 1/8	023Z0037	12	—	—	28	—	12
DCL 757s	7/8	023Z0115	12	—	4	22	—	12
DCL 759s	1 1/8	023Z0116	12	—	4	28	—	12

¹⁾ Wire mesh in filter drier outlet

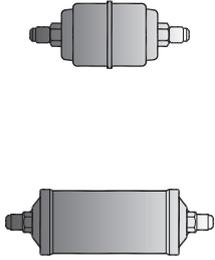Ordering
(continued)


Type DML Flare

Type	Conn.		Multi pack		Industrial pack for OEM only	
	[in.]	[mm]	Code no.	Qty.	Code no.	Qty.
DML 032	1/4	6	023Z5035 ¹⁾	32	023Z8035 ¹⁾	28
DML 033	3/8	10	023Z5036 ¹⁾	32	023Z8036 ¹⁾	28
DML 033	3/8	10	023Z5090	32	—	28
DML 052	1/4	6	023Z5037	24	023Z8037	16
DML 053	3/8	10	023Z5038	24	023Z8038	16
DML 082	1/4	6	023Z5039	24	023Z8039	16
DML 083	3/8	10	023Z5040	24	023Z8040	16
DML 084	1/2	12	023Z5041	24	023Z8041	16
DML 085	5/8	16	023Z5073	24	—	16
DML 162	1/4	6	023Z5042	12	023Z8042	12
DML 163	3/8	10	023Z5043	12	023Z8043	12
DML 164	1/2	12	023Z5044	12	023Z8044	12
DML 165	5/8	16	023Z5045	12	023Z8045	12
DML 166	3/4	19	023Z5046	12	—	12
DML 303	3/8	10	023Z0049	8	023Z3049	8
DML 304	1/2	12	023Z0050	8	023Z3050	8
DML 305	5/8	16	023Z0051	8	023Z3051	8
DML 306	3/4	19	023Z0193	8	023Z3193	8
DML 385	5/8	16	023Z0189	8	—	—
DML 413	3/8	10	023Z0108	8	—	6
DML 414	1/2	12	023Z0109	8	—	6
DML 415	5/8	16	023Z0110	8	023Z3110	6
DML 416	3/4	19	023Z0195	8	023Z0210	6

¹⁾ Wire mesh in filter drier outlet

Ordering
(continued)

Type DML solder (copper)



Type	Conn.	Multi pack		Industrial pack for OEM only		Conn.	Multi pack		Industrial pack for OEM only	
	[in.]	Code no.	Qty.	Code no.	Qty.		[mm]	Code no.	Qty.	Code no.
DML 032s	1/4	023Z5048 ¹⁾	32	023Z8048 ¹⁾	28	6	—	32	023Z8047	28
DML 032.5s	5/16	023Z5049	32	—	28	8	—	32	—	28
DML 033s	3/8	023Z5050	32	023Z8050	28	10	023Z5051	32	—	28
DML 034s	1/2	023Z5121	32	—	28	12	—	32	—	28
DML 052s	1/4	023Z5053	24	—	16	6	023Z5052	24	—	16
DML 053s	3/8	023Z5054	24	023Z8054	16	10	023Z5055	24	023Z8055	16
DML 054s	1/2	023Z5101	24	—	16	3.8	—	24	023Z3177	16
DML 055s	5/8	023Z5100	24	—	16	16	023Z5100	24	—	16
DML 082s	1/4	023Z5057	24	—	16	6	—	24	—	16
DML 082.5s	5/16	023Z5117	24	—	16	8	—	24	—	16
DML 083s	3/8	023Z5058	24	—	16	10	023Z5059	24	—	16
DML 084s	1/2	023Z5061	24	—	16	12	023Z5060	24	—	16
DML 085s	5/8	023Z5072	24	—	16	16	—	24	—	16
DML 162s	1/4	023Z5063	12	—	12	6	—	12	—	12
DML 163s	3/8	023Z5064	12	—	12	10	023Z5065	12	—	12
DML 164s	1/2	023Z5067	12	023Z8067	12	12	023Z5066	12	—	12
DML 165s	5/8	023Z5068	12	023Z8068	12	16	—	12	—	12
DML 166s	3/4	023Z5071	12	023Z8071	12	19	—	12	—	12
DML 167s	7/8	023Z5069	12	—	12	22	—	12	—	12
DML 303s	3/8	023Z0067	8	—	8	10	—	8	—	8
DML 304s	1/2	023Z0068	8	—	8	12	—	8	—	8
DML 305s	5/8	023Z0069	8	023Z3069	8	16	—	8	—	8
DML 306s	3/4	023Z0070	8	—	8	19	—	8	—	8
DML 307s	7/8	023Z0071	8	023Z3071	8	22	—	8	—	8
DML 309s	1 1/8	023Z0072	8	—	8	28	—	8	—	8
DML 414s	1/2	023Z0111	8	—	6	12	—	8	—	6
DML 415s	5/8	023Z0112	8	—	6	16	—	8	—	6
DML 416s	3/4	—	—	—	—	19	023Z8246	8	—	—
DML 417s	7/8	023Z0113	8	—	6	22	—	8	—	6
DML 419s	1 1/8	023Z0114	8	023Z3114	6	28	—	8	—	6
DML 604s	1/2	—	12	—	—	12	—	12	—	—
DML 607s	7/8	023Z0073	12	—	—	22	—	12	—	—
DML 609s	1 1/8	023Z0074	12	—	—	28	—	12	—	—
DML 757s	7/8	023Z0117	12	—	4	22	—	12	—	4
DML 759s	1 1/8	023Z0118	12	—	4	28	—	12	—	4


¹⁾ Wire mesh in filter drier outlet

Identification

Type codes

Filter drier	D	—
Solid core	C	80 / 20% composite core
	M	100% Molecular Sieve core
Application	L	Liquid line
Size (volume)	03	3 in ³
	05	5 in ³
	08	8 in ³
	16	16 in ³
	30	30 in ³
	41	41 in ³
	60	60 in ³
	75	75 in ³
Connection (filter connection in 1/8 of an inch increments)	2	1/4 in. / 6 mm
	2.5	5/16 in. / 8 mm
	3	3/8 in. / 10 mm
	4	1/2 in. / 12 mm
	5	5/8 in. / 16 mm
	6	3/4 in. / 18 (19) mm
	7	7/8 in. / 22 mm
	9	1 1/8 in. / 28 mm
Connection type	(blank)	Flare connection
	s	Solder connection (pure copper)

Example for type codes

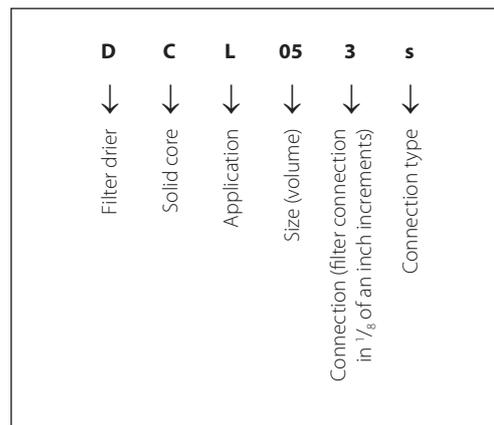

Selection

Type selection is made considering the application

		DCL	DML
Refrigerant	HC	Recommended	Recommended
	HFC	Recommended	Recommended
	HCFC	Recommended	Recommended
Oil	Mineral or AB	Recommended	Recommended
	POE or PAG, pure	Recommended	Recommended
	POE or PAG, with additives	Not recommended ¹⁾	Recommended

¹⁾ DCL filter driers contain activated alumina, which is a polar material used for acid adsorption. Many oil additives are also polar substances and can be adsorbed by the activated alumina, rendering them useless, and reducing the drier's acid capacity, though this is not harmful to the system.

Example

SI-units

Select the appropriate type (DML or DCL) based on refrigerant and oil type. Then select the drier size based on the adsorption and liquid capacity required.

a. Amount of charge: 25 kg R134a at $t_l = 24\text{ °C}$
To dry 25 kg R134a at 24 °C from 1050 to 60 ppm moisture, a DML 16 is necessary.

b. Cooling capacity: $Q_e = 20\text{ kW}$
To obtain a mass flow corresponding to 20 kW cooling capacity with a DML 16 filter drier, a 3/8 inch connection must be chosen. Larger connections can be chosen in accordance with the liquid line dimension.

c. Result


DML 163 or DML 163s can be used.

If the initial moisture content is very small or a planned change of the filter drier is considered, a smaller filter drier size can be chosen.


Type	Drying capacity [kg] refrigerant ¹⁾						Liquid capacity [kW] ²⁾			Max. Working Pressure PS [bar]
	R134a		R404A R507		R22, R407C R410A		R134a	R404A R507	R22 R407C R410A	
	[°C]									
	24	52	24	52	24	52				
DML 032/032s	5.5	5	7.5	4.5	4.5	4	7	5	7	46
DML 032.5s	5.5	5	7.5	4.5	4.5	4	9	7	10	46
DML 033/033s	5.5	5	7.5	4.5	4.5	4	11	9	13	46
DML 033.5s	5.5	5	7.5	4.5	4.5	4	13	11	15	46
DML 034/034s	5.5	5	7.5	4.5	4.5	4	15	13	17	46
DML 034.5s	5.5	5	7.5	4.5	4.5	4	17	15	19	46
DML 035/035s	5.5	5	7.5	4.5	4.5	4	19	17	21	46
DML 035.5s	5.5	5	7.5	4.5	4.5	4	21	19	23	46
DML 036/036s	5.5	5	7.5	4.5	4.5	4	23	21	25	46
DML 036.5s	5.5	5	7.5	4.5	4.5	4	25	23	27	46
DML 037/037s	5.5	5	7.5	4.5	4.5	4	27	25	29	46
DML 037.5s	5.5	5	7.5	4.5	4.5	4	29	27	31	46
DML 038/038s	5.5	5	7.5	4.5	4.5	4	31	29	33	46
DML 038.5s	5.5	5	7.5	4.5	4.5	4	33	31	35	46
DML 039/039s	5.5	5	7.5	4.5	4.5	4	35	33	37	46
DML 039.5s	5.5	5	7.5	4.5	4.5	4	37	35	39	46
DML 040/040s	5.5	5	7.5	4.5	4.5	4	39	37	41	46
DML 040.5s	5.5	5	7.5	4.5	4.5	4	41	39	43	46
DML 041/041s	5.5	5	7.5	4.5	4.5	4	43	41	45	46
DML 041.5s	5.5	5	7.5	4.5	4.5	4	45	43	47	46
DML 042/042s	5.5	5	7.5	4.5	4.5	4	47	45	49	46
DML 042.5s	5.5	5	7.5	4.5	4.5	4	49	47	51	46
DML 043/043s	5.5	5	7.5	4.5	4.5	4	51	49	53	46
DML 043.5s	5.5	5	7.5	4.5	4.5	4	53	51	55	46
DML 044/044s	5.5	5	7.5	4.5	4.5	4	55	53	57	46
DML 044.5s	5.5	5	7.5	4.5	4.5	4	57	55	59	46
DML 045/045s	5.5	5	7.5	4.5	4.5	4	59	57	61	46
DML 045.5s	5.5	5	7.5	4.5	4.5	4	61	59	63	46
DML 046/046s	5.5	5	7.5	4.5	4.5	4	63	61	65	46
DML 046.5s	5.5	5	7.5	4.5	4.5	4	65	63	67	46
DML 047/047s	5.5	5	7.5	4.5	4.5	4	67	65	69	46
DML 047.5s	5.5	5	7.5	4.5	4.5	4	69	67	71	46
DML 048/048s	5.5	5	7.5	4.5	4.5	4	71	69	73	46
DML 048.5s	5.5	5	7.5	4.5	4.5	4	73	71	75	46
DML 049/049s	5.5	5	7.5	4.5	4.5	4	75	73	77	46
DML 049.5s	5.5	5	7.5	4.5	4.5	4	77	75	79	46
DML 050/050s	5.5	5	7.5	4.5	4.5	4	79	77	81	46
DML 050.5s	5.5	5	7.5	4.5	4.5	4	81	79	83	46
DML 051/051s	5.5	5	7.5	4.5	4.5	4	83	81	85	46
DML 051.5s	5.5	5	7.5	4.5	4.5	4	85	83	87	46
DML 052/052s	5.5	5	7.5	4.5	4.5	4	87	85	89	46
DML 052.5s	5.5	5	7.5	4.5	4.5	4	89	87	91	46
DML 053/053s	5.5	5	7.5	4.5	4.5	4	91	89	93	46
DML 053.5s	5.5	5	7.5	4.5	4.5	4	93	91	95	46
DML 054/054s	5.5	5	7.5	4.5	4.5	4	95	93	97	46
DML 054.5s	5.5	5	7.5	4.5	4.5	4	97	95	99	46
DML 055/055s	5.5	5	7.5	4.5	4.5	4	99	97	101	46
DML 055.5s	5.5	5	7.5	4.5	4.5	4	101	99	103	46
DML 056/056s	5.5	5	7.5	4.5	4.5	4	103	101	105	46
DML 056.5s	5.5	5	7.5	4.5	4.5	4	105	103	107	46
DML 057/057s	5.5	5	7.5	4.5	4.5	4	107	105	109	46
DML 057.5s	5.5	5	7.5	4.5	4.5	4	109	107	111	46
DML 058/058s	5.5	5	7.5	4.5	4.5	4	111	109	113	46
DML 058.5s	5.5	5	7.5	4.5	4.5	4	113	111	115	46
DML 059/059s	5.5	5	7.5	4.5	4.5	4	115	113	117	46
DML 059.5s	5.5	5	7.5	4.5	4.5	4	117	115	119	46
DML 060/060s	5.5	5	7.5	4.5	4.5	4	119	117	121	46
DML 060.5s	5.5	5	7.5	4.5	4.5	4	121	119	123	46
DML 061/061s	5.5	5	7.5	4.5	4.5	4	123	121	125	46
DML 061.5s	5.5	5	7.5	4.5	4.5	4	125	123	127	46
DML 062/062s	5.5	5	7.5	4.5	4.5	4	127	125	129	46
DML 062.5s	5.5	5	7.5	4.5	4.5	4	129	127	131	46
DML 063/063s	5.5	5	7.5	4.5	4.5	4	131	129	133	46
DML 063.5s	5.5	5	7.5	4.5	4.5	4	133	131	135	46
DML 064/064s	5.5	5	7.5	4.5	4.5	4	135	133	137	46
DML 064.5s	5.5	5	7.5	4.5	4.5	4	137	135	139	46
DML 065/065s	5.5	5	7.5	4.5	4.5	4	139	137	141	46
DML 065.5s	5.5	5	7.5	4.5	4.5	4	141	139	143	46
DML 066/066s	5.5	5	7.5	4.5	4.5	4	143	141	145	46
DML 066.5s	5.5	5	7.5	4.5	4.5	4	145	143	147	46
DML 067/067s	5.5	5	7.5	4.5	4.5	4	147	145	149	46
DML 067.5s	5.5	5	7.5	4.5	4.5	4	149	147	151	46
DML 068/068s	5.5	5	7.5	4.5	4.5	4	151	149	153	46
DML 068.5s	5.5	5	7.5	4.5	4.5	4	153	151	155	46
DML 069/069s	5.5	5	7.5	4.5	4.5	4	155	153	157	46
DML 069.5s	5.5	5	7.5	4.5	4.5	4	157	155	159	46
DML 070/070s	5.5	5	7.5	4.5	4.5	4	159	157	161	46
DML 070.5s	5.5	5	7.5	4.5	4.5	4	161	159	163	46
DML 071/071s	5.5	5	7.5	4.5	4.5	4	163	161	165	46
DML 071.5s	5.5	5	7.5	4.5	4.5	4	165	163	167	46
DML 072/072s	5.5	5	7.5	4.5	4.5	4	167	165	169	46
DML 072.5s	5.5	5	7.5	4.5	4.5	4	169	167	171	46
DML 073/073s	5.5	5	7.5	4.5	4.5	4	171	169	173	46
DML 073.5s	5.5	5	7.5	4.5	4.5	4	173	171	175	46
DML 074/074s	5.5	5	7.5	4.5	4.5	4	175	173	177	46
DML 074.5s	5.5	5	7.5	4.5	4.5	4	177	175	179	46
DML 075/075s	5.5	5	7.5	4.5	4.5	4	179	177	181	46
DML 075.5s	5.5	5	7.5	4.5	4.5	4	181	179	183	46
DML 076/076s	5.5	5	7.5	4.5	4.5	4	183	181	185	46
DML 076.5s	5.5	5	7.5	4.5	4.5	4	185	183	187	46
DML 077/077s	5.5	5	7.5	4.5	4.5	4	187	185	189	46
DML 077.5s	5.5	5	7.5	4.5	4.5	4	189	187	191	46
DML 078/078s	5.5	5	7.5	4.5	4.5	4	191	189	193	46
DML 078.5s	5.5	5	7.5	4.5	4.5	4	193	191	195	46
DML 079/079s	5.5	5	7.5	4.5	4.5	4	195	193	197	46
DML 079.5s	5.5	5	7.5	4.5	4.5	4	197	195	199	46
DML 080/080s	5.5	5	7.5	4.5	4.5	4	199	197	201	46
DML 080.5s	5.5	5	7.5	4.5	4.5	4	201	199	203	46
DML 081/081s	5.5	5	7.5	4.5	4.5	4	203	201	205	46
DML 081.5s	5.5	5	7.5	4.5	4.5	4	205	203	207	46
DML 082/082s	5.5	5	7.5	4.5	4.5	4	207	205	209	46
DML 082.5s	5.5	5	7.5	4.5	4.5	4	209	207	211	46
DML 083/083s	5.5	5	7.5	4.5	4.5	4	211	209	213	46
DML 083.5s	5.5	5	7.5	4.5	4.5	4	213	211</		

Design / Function


DML / DCL 03

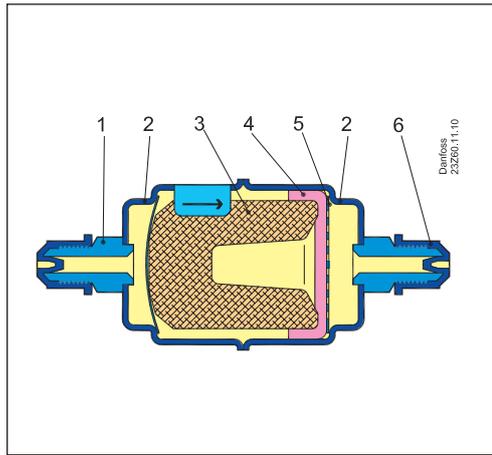


DML / DCL 05

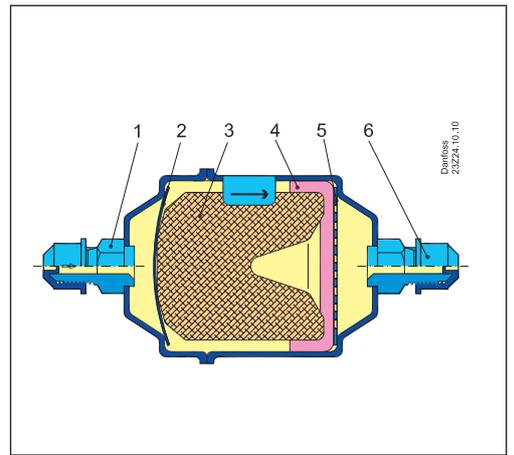


DML / DCL 08, DML / DCL 16

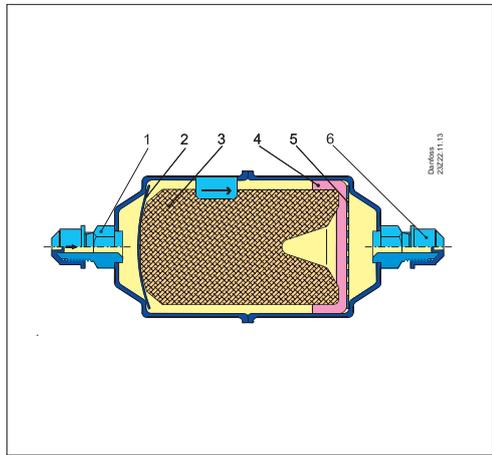

DML / DCL 30, DML / DCL 41

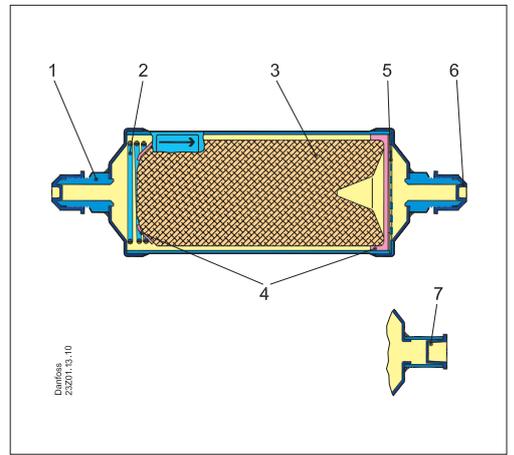

DML / DCL 60, DML / DCL 75

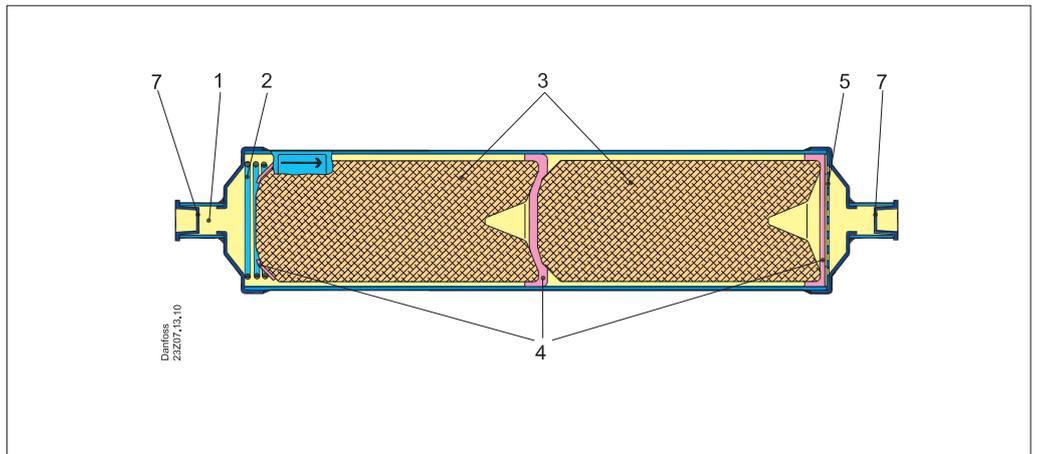


- 1. Inlet
- 2. Spring
- 3. Solid core
- 4. Polyester mat
- 5. Perforated plate
- 6. Seal cap, flare connection
- 7. Seal cap, solder connection

The relatively large diameter of the filter drier means that the liquid flow velocity is suitably low and the pressure drop minimal.


Powder formation is eliminated because the solid core grains are bonded and cannot move against each other.

Dimensions [mm]
and weights [kg]

Flare connections

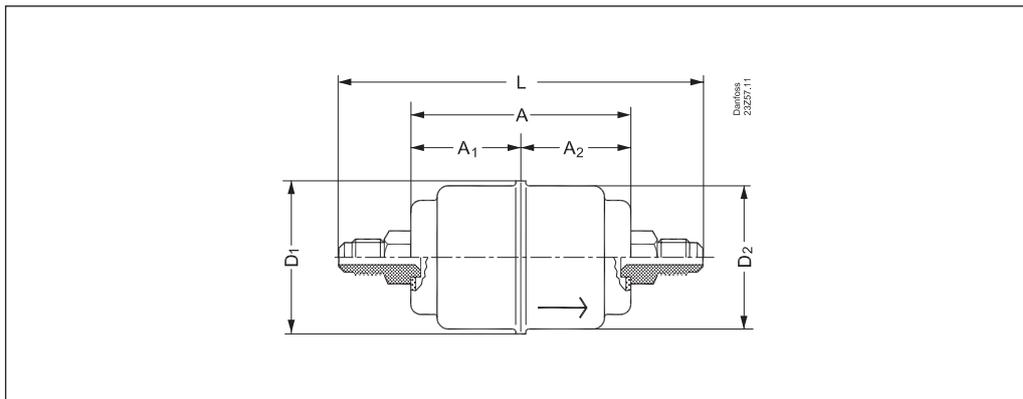


Type	A	A ₁	A ₂	L	D ₁	D ₂	Net weight
DCL/DML 032	66	33	33	110	46	43	0.20
DCL/DML 033	66	33	33	123	46	43	0.23

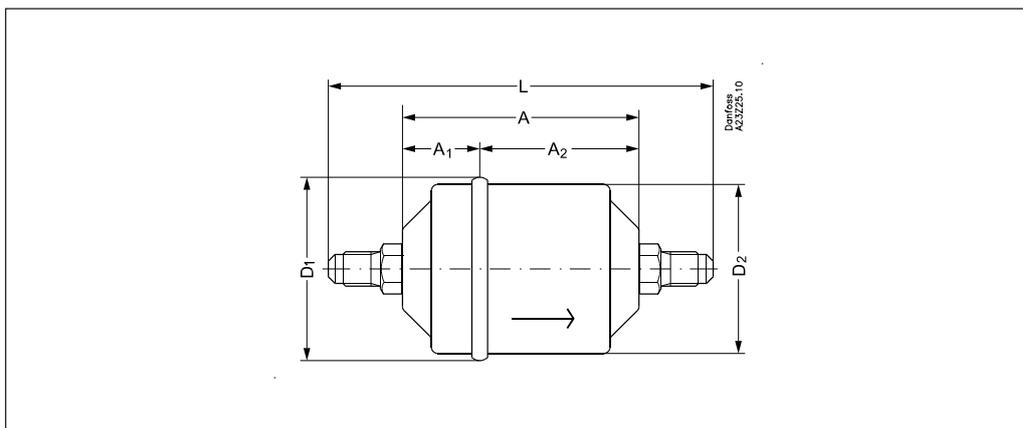


Type	A	A ₁	A ₂	L	D ₁	D ₂	Net weight
DCL/DML 052	75	24.5	50.5	119	58	54	0.39
DCL/DML 053	75	24.5	50.5	132	58	54	0.42

Dimensions [mm]
and weights [kg]
(continued)

Flare connections

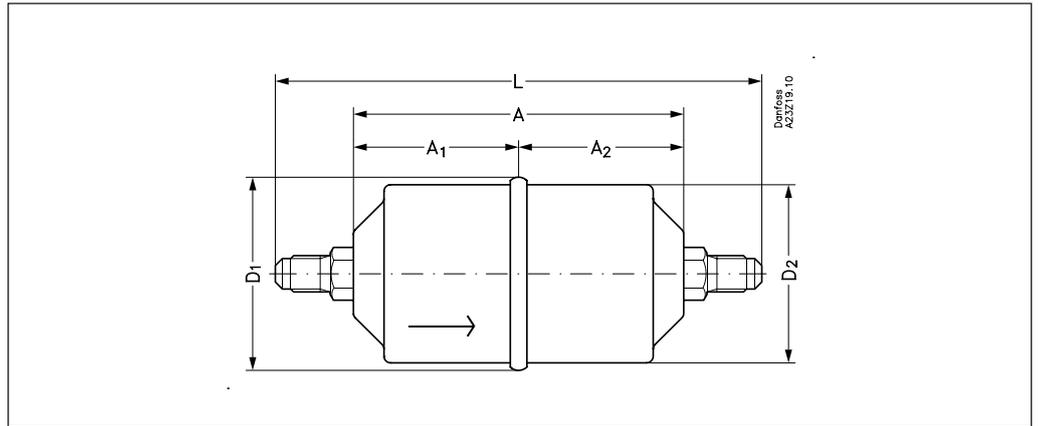


Type	A	A ₁	A ₂	L	D ₁	D ₂	Net weight
DCL/DML 082	101	50.5	50.5	145	58	54	0.40
DCL/DML 083	101	50.5	50.5	158	58	54	0.44
DCL/DML 084	101	50.5	50.5	166	58	54	0.48
DML 085	101	50.5	50.5	175	58	54	0.52
DCL/DML 162	110	55	55	154	80	76	0.79
DCL/DML 163	110	55	55	167	80	76	0.82
DCL/DML 164	110	55	55	175	80	76	0.87
DCL/DML 165	110	55	55	184	80	76	0.91
DCL/DML 166	110	55	55	182	80	76	0.99

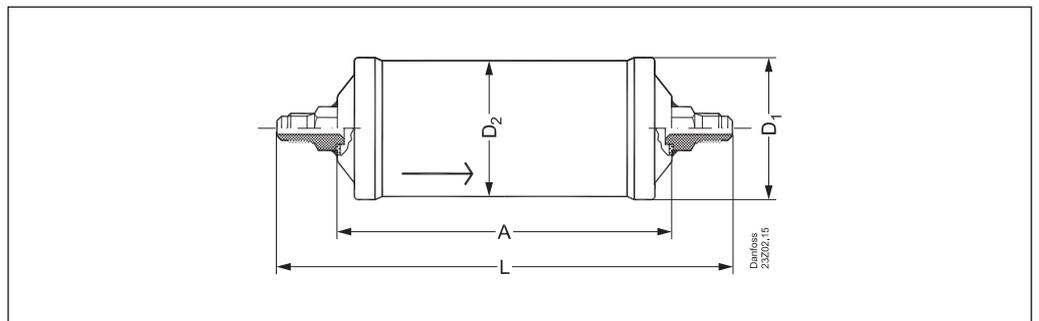


Type	A	L	D ₁	D ₂	Net weight
DCL/DML 303	186	243	80	76	1.33
DCL/DML 304	186	251	80	76	1.38
DCL/DML 305	186	260	80	76	1.42
DCL/DML 306	186	258	80	76	1.49
DCL/DML 413	187	244	93	89	1.86
DCL/DML 414	187	252	93	89	1.91
DCL/DML 415	187	261	93	89	1.95

Dimensions [mm]
and weights [kg]
(continued)

Solder connections

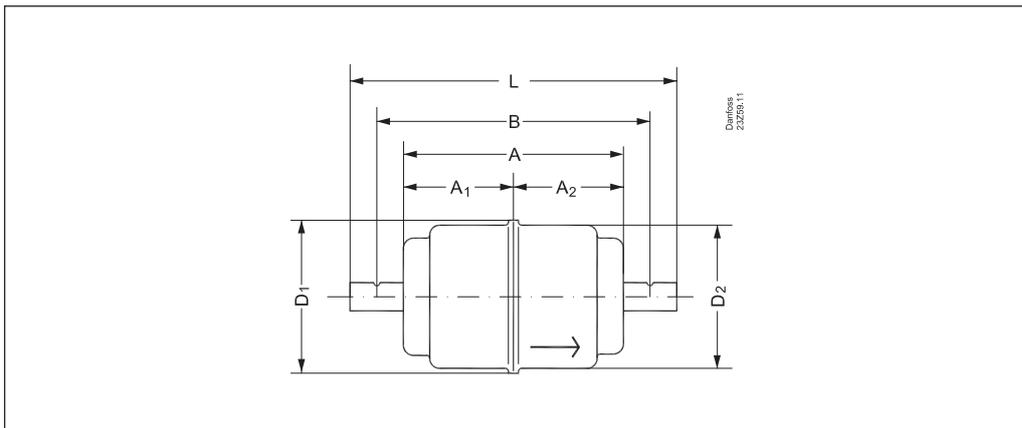


Type	A	A ₁	A ₂	B	L	D ₁	D ₂	Net weight
DCL/DML 032s	66	33	33	82	98	46	43	0.18
DCL/DML 032.5s	66	33	33	84	102	46	43	0.19
DCL/DML 033s	66	33	33	85	104	46	43	0.19
DCL/DML 034s	66	33	33	87	108	46	43	0.20

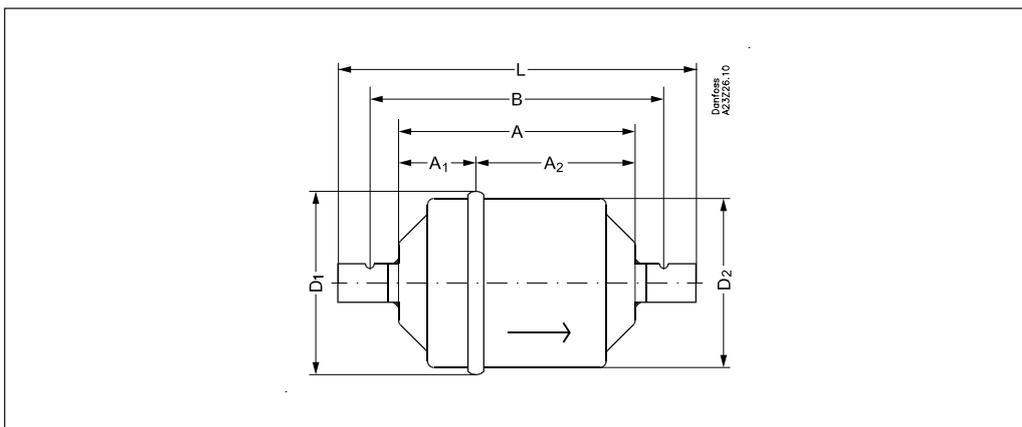

Type	A	A ₁	A ₂	B	L	D ₁	D ₂	Net weight
DCL/DML 052s	75	24.5	50.5	91	107	58	54	0.37
DCL/DML 052.5s	75	24.5	50.5	93	111	58	54	0.38
DCL/DML 053s	75	24.5	50.5	94	113	58	54	0.38
DML 054s	75	24.5	50.5	96	117	58	54	0.39
DML 055s	75	24.5	50.5	99	123	58	54	0.40

**Dimensions [mm]
and weights [kg]**
(continued)


Solder connections

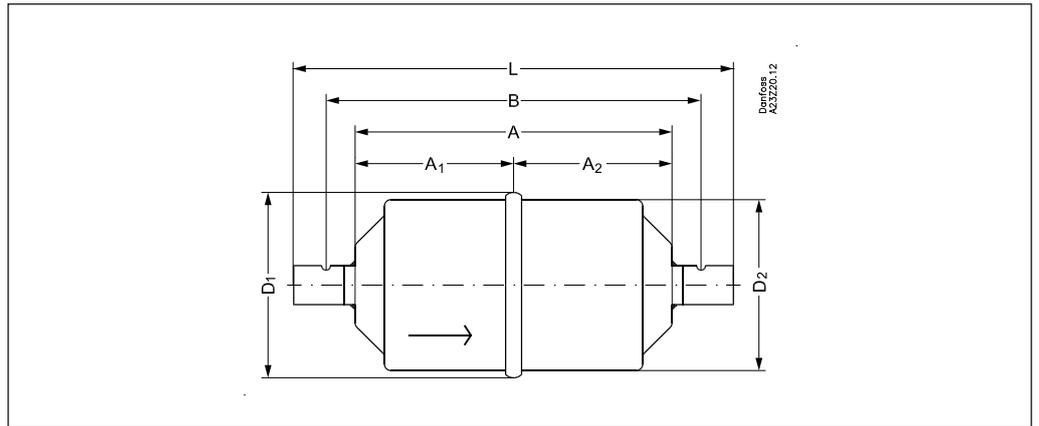

Type	A	A ₁	A ₂	B	L	D ₁	D ₂	Net weight
DCL/DML 082s	101	50.5	50.5	117	133	58	54	0.38
DCL/DML 082.5s	101	50.5	50.5	119	137	58	54	0.39
DCL/DML 083s	101	50.5	50.5	120	139	58	54	0.39
DCL/DML 084s	101	50.5	50.5	122	143	58	54	0.40
DML 085s	101	50.5	50.5	125	149	58	54	0.41
DCL/DML 162s	110	55	55	126	142	80	76	0.77
DCL/DML 162.5s	110	55	55	128	146	80	76	0.78
DCL/DML 163s	110	55	55	129	148	80	76	0.78
DCL/DML 164s	110	55	55	131	152	80	76	0.79
DCL/DML 165s	110	55	55	134	158	80	76	0.80
DCL/DML 166s	110	55	55	140	170	80	76	0.82
DCL/DML 167s	110	55	55	136	172	80	76	0.84

**Dimensions [mm]
and weights [kg]**
(continued)

Solder connections

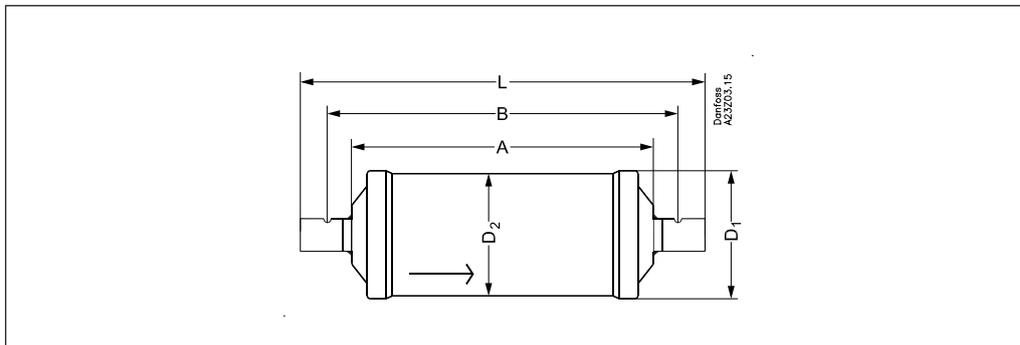

Type	A	B	L	D ₁	D ₂	Net weight
DCL/DML 303s	186	205	224	80	76	1.29
DCL/DML 304s	186	207	228	80	76	1.30
DCL/DML 305s	186	210	234	80	76	1.31
DCL/DML 306s	186	216	246	80	76	1.33
DCL/DML 307s	186	212	248	80	76	1.35
DCL/DML 309s	186	207	249	80	76	1.36
DCL/DML 414s	187	208	229	93	89	2.03
DCL/DML 415s	187	211	235	93	89	2.04
DCL/DML 417s	187	213	249	93	89	2.08
DCL/DML 419s	187	208	250	93	89	2.09
DCL/DML 604s	337	358	379	80	76	2.34
DCL/DML 607s	337	363	399	80	76	2.39
DCL/DML 609s	337	358	400	80	76	2.40
DCL/DML 757s	338	364	400	93	89	3.38
DCL/DML 759s	338	359	401	93	89	3.39